

## 1030nm 4-port Optical Circulator for Pulse Power

### FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

### APPLICATIONS


- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Dispersion Compensation
- Light Routing

### SPECIFICATIONS

Parameter	Unit	Value
Center Wavelength	nm	1030
Operating Wavelength Range	nm	+/-10
Insertion Loss@ 23 °C (1→2, 2→3, 3→4)	(Typ.) dB	0.9
	(Max.) dB	1.7
Optical Path	C Type	1→2, 2→3, 3→4 (Loss:4→1 is Uncontrolled)
	D Type	1→2, 2→3, 3→4, 4→1
	E Type	1→2, 2→3, 3→4 (4→1 is Isolated)
Isolation @ 23 °C (4→3, 3→2, 2→1)	(Typ.) dB	23
	(Min.) dB	20
Optical Return Loss	dB	≥45
Polarization Dependent Loss	dB	≤0.2
Fiber Type	-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)
Fiber Tensile Load	N	5
Max. Total Average Optical Power	W	0.5, 1, 2, 3, 5, 10, 15, 20, 25, 30
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20
Operating Temperature	°C	0~50
Storage Temperature	°C	-20~75

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
  - To add connectors, IL is 0.5dB higher, RL is 5dB lower.
  - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
  - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
  - Package size may be different for different optical power, configuration and fiber types.

### DIMENSION DRAWING

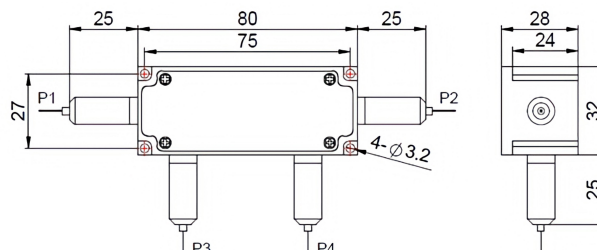

### ORDERING INFORMATION (PN)

FCIR- NNNN	- (C)	-4H NN	PNN	- (NN/NN)	- (NN)	- (C)	C	NN	-CC/CCC
Center Wavelength	Optical Path	Average Power(Total)	Peak Power	Average Power P2/P3	Average Power P4	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1030-1030nm	D=D Type	05=500mW	01=100W	1= 1W	1= 1W	E=10/125 SC Fiber	B= Bare fiber	05=0.5m	N=Without Connector
	E=E Type	1=1W	1= 1kW	2= 2W	2= 2W	Q=20/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
	Blank for C Type	5=5W	10= 10kW	5=5W	5=5W	R=25/250 DC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
		20=20W	20=20kW	Blank for P2/3-P1	Blank for None	Blank for HI1060 Fiber	3= 3mm Cable	20=2.0m	SC/UFC=SC/UFC Connector

