

1064nm 4-port Optical Circulator for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS


- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Dispersion Compensation
- Light Routing

SPECIFICATIONS

Parameter	Unit	Value
Center Wavelength	nm	1064
Operating Wavelength Range	nm	+/-10
Insertion Loss@ 23 °C	(Typ.)	dB
	(Max.)	dB
Optical Path	C Type	-
	D Type	-
	E Type	-
Isolation @ 23 °C	(Typ.)	dB
	(Min.)	dB
Optical Return Loss	dB	≥45
Polarization Dependent Loss	dB	≤0.2
Fiber Type	-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)
Fiber Tensile Load	N	5
Max. Total Average Optical Power	W	0.5, 1, 2, 3, 5, 10, 15, 20, 25, 30
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20
Operating Temperature	°C	0~50
Storage Temperature	°C	-20~75

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.5dB higher, RL is 5dB lower.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 - Package size may be different for different optical power, configuration and fiber types.

DIMENSION DRAWING

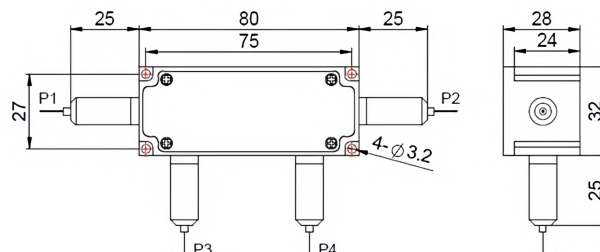

ORDERING INFORMATION (PN)

FCIR-NNNN	- (C)	-4H NN	P NN	-(NN/NN)	-(NN)	-(C)	C	NN	-CC/CCC
Center Wavelength	Optical Path	Average Power(Total)	Peak Power	Average Power P2/P3	Average Power P4	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1064~1064nm	D=D Type	0.5~500mW	0.1~100W	1~1W	1~1W	E=10/125 SC Fiber	B= Bare fiber	0.5~0.5m	N=Without Connector
	E=E Type	1~1W	1~1kW	2~2W	2~2W	Q=20/130 DC Fiber	L= Loose Tube	10~1.0m	FC/APC=FC/APC Connector
	Blank for C Type	5~5W	10~10kW	5~5W	5~5W	R=25/250 DC Fiber	2= 2mm Cable	15~1.5m	LC/PC=LC/PC Connector
		20~20W	20~20kW	Blank for P2/3=P1	Blank for None	Blank for HI1060 Fiber	3= 3mm Cable	20~2.0m	SC/UPC=SC/UPC Connector

