

## 1080nm 3-port Circulator for Pulse Power

### FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

### APPLICATIONS

- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Dispersion Compensation
- Light Routing




### SPECIFICATIONS

Parameter	Unit	Value
Working Wavelength	nm	1080+/-5
Insertion Loss@23°C	(Typ.)	2.0
	(Max.)	2.4
Isolation	(Typ.)	26
	(Min.)	22
PDL	dB	≤0.2
Optical Return Loss	dB	≥50
Cross Talk	dB	≥45
Fiber Type	-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)
Fiber Tensile Load	N	5
Max. Average Optical Power	mW	300
Max. Peak Power for Pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20
Operating Temperature	°C	0~50
Storage Temperature	°C	-10~65

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
  2. To add connectors, IL is 0.5dB higher, RL is 5dB lower.
  3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
  4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

### PACKAGE DIMENSION

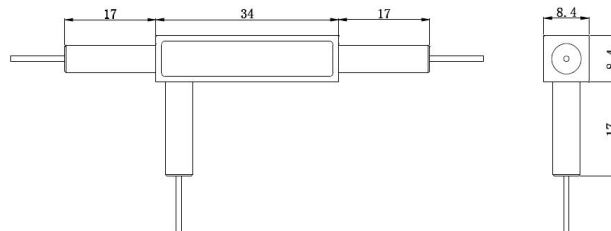

### ORDERING INFORMATION (PN)

<b>FCIR-</b>	<b>NNNN</b>	<b>-3H</b>	<b>NN</b>	<b>P</b>	<b>NN</b>	<b>-</b>	<b>(C)</b>	<b>C</b>	<b>NN</b>	<b>-</b>	<b>CC/CCC</b>
<i>Center Wavelength</i>		<i>Average Power</i>		<i>Peak Power</i>		<i>Fiber Type</i>		<i>Fiber Sleeve</i>	<i>Fiber Length</i>		<i>Connector Type</i>
1080=1080nm		03=300mW		01=100W		E=10/125 SC Fiber		B= Bare fiber	05=0.5m		N=Without Connector
				1= 1kW		Q=20/130 DC Fiber		L= Loose Tube	10=1.0m		FC/APC=FC/APC Connector
				10= 10kW		R=25/250 DC Fiber		2= 2mm Cable	15=1.5m		LC/PC=LC/PC Connector
				20=20kW		Blank for HI1060 Fiber		3= 3mm Cable	20=2.0m		SC/UPC=SC/UPC Connector