

915/1064nm Mini-Size PM WDM/Isolator Hybrid

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability

APPLICATIONS



- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- CATV Networks

SPECIFICATIONS

Parameters	Unit	Value	
Signal Wavelength Range λ_1	nm	1064+/-10	
Pump Wavelength Range λ_2	nm	915+/-10	
Insertion Loss@23°C	Signal Channel@ λ_1	dB	≤ 2.9
	Pump Channel@ λ_2	dB	≤ 3.4
Signal Isolation (23°C, All SOP)	Signal Channel@ λ_2	dB	≥ 22
	Pump Channel@ λ_1	dB	≥ 25
Wavelength Isolation	Signal Channel@ λ_2	dB	≥ 25
	Pump Channel@ λ_1	dB	≥ 12
Optical Return Loss	dB	≥ 45	
Extinction Ratio	dB	≥ 18	
Working Mode	S Type	-	Can only work in Slow Axis
	F Type	-	Can work both in Slow Axis and Fast Axis
Fiber Type	Common and Signal Port	-	PM850 Fiber, PM980 Fiber or PM1060L Fiber (E)
		-	10/125um PMDC Fiber (O), 15/130um PMDC Fiber (W)
		-	20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)
	Pump Port (915nm)	-	Same Fiber, Corr. SM Fiber, PM850 Fiber, HI780 Fiber, PM980 Fiber (M) or HI1060 Fiber (X)
Fiber Tensile Load	N	5	
Max. Signal Optical Power (CW)	W	0.5, 1	2, 3, 4, 5
Max. Pump Optical Power (CW)	W	0.3, 0.5, 1, 2, 3, 5, 10	
Operating Temperature	°C	0~50	
Storage Temperature	°C	-40~85	

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.7dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION

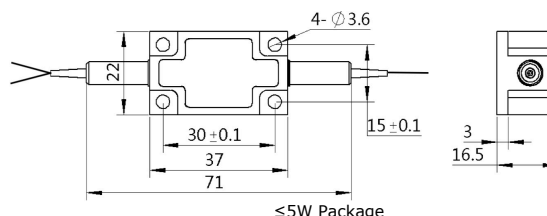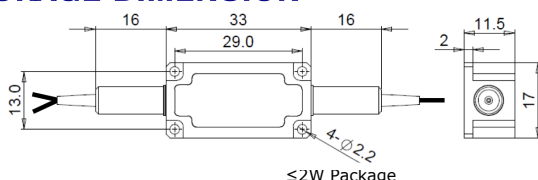

ORDERING INFORMATION (PN)

FPHW-9106-MC	C	C	-HP NN	- (NN)	- C	C	NN	- CC/CCC
Pump Type	Work Mode	Pump Fiber	Optical Power	Pump Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
F= Forward	S= S Type	P=PM850 Fiber	05=500mW	05=500mW	2=PM850Fiber	B= Bare fiber	05=0.5m	N=Without Connector
B=Backward	F= F Type	Y=Same Fiber	1= 1W	1=W	H=PM980 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
		S=Corr. SM Fiber	2= 2W	10=W	E=PM1060L Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
		H=HI780 Fiber	5=5W	Blank for 300mW	R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector

